



Website

# RespiroX<sup>®</sup>



[www.respirox.com.tr](http://www.respirox.com.tr)

[info@respirox.com.tr](mailto:info@respirox.com.tr)

444 78 96

# MASKS

## RN01 NASAL MASK



Thanks to its **special mask filter**, it provides silent use and comfortable sleep.

Thanks to its **easily attachable and detachable design**, the patient can be separated from the tube without removing the mask.

Thanks to its **360° elbow**, it allows the patient to move easily during sleep.

**The design of the headband** makes the mask easy to put on, adjust and clean.

It increases comfort as **it puts very little pressure** on the bridge of the nose.

## RNX NASAL MASK



**One size fits** all faces.

Thanks to its specially **designed padded head**, it prevents sweating and increases the feeling of comfort.

**With its soft headband**, it does not cause discomfort and does not leave marks.

Thanks to the **ventilation system distributed** in the mask mold, the air is distributed silently and evenly.

**Thanks to its double-layered** soft nose silicone, it provides softness on the bridge of the nose and prevents pressure.

It is compatible with every patient with its **flexible and winged forehead support**.

## RF01 FULL FACE MASK



It provides comfort during the treatment by **minimizing the contact with the face**.

Thanks to its **flexible headband and clips**, it can be easily tracked.

Thanks to its **anti-asphyxia valve system**, it prevents the patient from breathing CO<sub>2</sub> again in case of a possible malfunction.

**Thanks to its double inlet**, it offers multiple options such as adding oxygen during treatment and/or adding a measuring cannula for titration.

Thanks to its **structure compatible with the face structure**, it does not irritate the skin and provides healthy use.

Thanks to its **360° elbow**, it allows the patient to move easily during sleep.

## RF02 NONINV & INV FULL FACE MASK



It is suitable for both **invasive** and **non-invasive** use.

It is also suitable for use in ventilator devices with hoses with **single-circuit or double-circuit** expiratory valves.

Thanks to its **double inlet**, it allows multiple options such as adding oxygen and/or measuring cannula during treatment.

Thanks to the **adjustable silicone forehead support**, it provides comfortable use by reducing the pressure on the forehead.

Thanks to its **360° elbow**, it allows the patient to move easily during sleep.

## RT01 TOTAL FACE MASK



**The large surface area** prevents eye irritation by equalizing the air pressure inside the mask.

It is suitable for both **invasive** and **non invasive** use.

Thanks to its **anti-asphyxia valve system**, it prevents the patient from breathing CO<sub>2</sub> again in case of malfunction.

Thanks to its **transparent structure**, it does not impair the patient's vision and does not restrict the field of view.

The mask **is placed on the less pressure sensitive areas around the face**, preventing discomfort on the nose, forehead and cheeks.



# MEDICRAFT VENTICURE | 60

**ONLY 3.7KG**

EASY TO CARRY

THANKS TO  
ITS LIGHTWEIGHT  
AND ERGONOMIC DESIGN



WIDE ALARM  
OPTION



WIDE COLORFUL  
TOUCH SCREEN  
(7 inches)



FILTERING DURING  
INSPIRATION AND EXPIRATION



ULTRA SILENT



Designed with a powerful and silent engine,  
● Medicraft VentiCure | 60 offers users a comfortable treatment.

It cleans the ambient air with **its advanced**

- **filtering system** and eliminates the risks that may occur during inspiration and expiration.

With its **wide alarm option**, it provides auditory and visual protection for all possible complications.

VentiCure | 60, with **its multi-functional color**

- **screen**, is suitable for use in intensive care and ambulances thanks to its screen design that can be easily seen from every angle, as well as being able to be used with gloves.

**Weighing only 3.7 kg**, VentiCure | 60 can be easily

- transported with its light and ergonomic design.

## Package Included



Adapter



Single Or Double  
Circuit



Oxygen Inlet Port



Replacement Filter Set



Carrying Bag

## Optional



SPO2 Sensor



FIO2 Sensor


# MEDICRAFT VENTICURE | 60

SPECIFICATIONS	PARAMETERS
Power Source:	100-240 V, 50-60 Hz 24 V DC / 5A
Internal Battery:	Lithium-ion battery, 18 V / 4.9 Ah / 90 Wh
Electrical Protection:	Class II, type BF
Dimensions:	280 x 300 x 175 mm
Weight:	3,71 kg
Working Modes:	PCV, APCV, VCV, AVCV, P-SIMV, V-SIMV, CPAP, PSV, PSV-S
Max. Operating pressure:	60 hPa
Min. Operating pressure:	3 hPa
Max. Flow:	200 l/sec
Pressure (P):	3-60 mbar
Frequency (F):	4-50 bpm
I:E:	1:0,1-1:25
Inspiratory Volume (VI):	50 – 2000 ml
Minute Volume (MV):	0 – 25 L
FiO2:	%20 - %80
SpO2:	%0 ~ %100
Heart Rate (HR):	25-250 bpm



**Volume - Pressure Cycle**

The harmony between the patient and the ventilator can be easily understood thanks to the loop graph that can be interpreted by the expert clinical personnel and provides information on lung compliance and hysteresis.

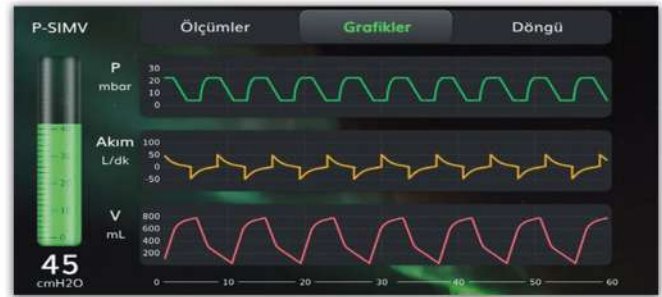

**Pressure - Flow - Volume Graph**

The delivery of a breath to the patient is shown with three separate scalar graphs; evaluation of the patient's respiratory mechanics and ventilator interaction is facilitated.

Thanks to the understandable and colorful display, the data of the treatment can be followed with the graphics that can be easily interpreted by the expert clinical personnel.

# UNIFLOW SERIES



## RespiroX UNIFLOW Series

CPAP / AUTO CPAP / BILEVEL  
/ BILEVEL ST/ BILEVEL AP /  
BILEVEL PV / ASV

### Adjustable Parameters

#### Pressure (P):

4 – 20 mbar (CPAP / AUTO CPAP)

4 – 25 mbar (BILEVEL / BILEVEL AP)

4 – 35 mbar (BILEVEL ST / BILEVEL PV/ASV)

#### Frequency (F):

4 – 40 bpm (BILEVEL ST / BILEVEL PV / ASV)

#### Target Volume (VT):

200 – 1200 ml (BILEVEL PV – ASV)

SpO2: %0 ~ %100

### UNIFLOW SERIES SPECIFICATIONS

	CPAP	APAP	BILEVEL	BILEVEL ST	AUTO BILEVEL	BILEVEL PV	ASV
<b>Modes</b>							
CPAP	●	●	●	●	●	●	●
APAP		●	●	●	●	●	●
SPONTAN(S)			●	●	●	●	●
TIME(T)				●		●	●
SPONTAN TIME (S/T)				●		●	●
AUTO SPONTAN					●		
BILEVEL PV						●	●
ASV							●

#### Device Features

Dimensions (270 x 178 x 124mm)	●	●	●	●	●	●	●
Weight (1.72 kg)	●	●	●	●	●	●	●
Noise Level (<26 dB)	●	●	●	●	●	●	●
Pressure Range	4-20 mbar	4-20 mbar	4-25 mbar	4-35 mbar	4-25 mbar	4-35 mbar	4-35 mbar
Resflex	●	●	●	●	●	●	●
Ramp (0-60min)	●	●	●	●	●	●	●
Humidifier Setting	●	●	●	●	●	●	●
Integrated Humidifier	●	●	●	●	●	●	●
Auto Start - Stop	●	●	●	●	●	●	●
Automatic Leak Prevention	●	●	●	●	●	●	●
SD Card	●	●	●	●	●	●	●
365 Days Recording Feature	●	●	●	●	●	●	●
Alarm clock	●	●	●	●	●	●	●





# UNIFLOW SERIES

## Advanced Filtering



It offers you a safe therapy by **filtering everything from the air** that may harm your health.



## 365 DAYS DATA RECORD




With the **memory card** placed on the device, you can easily access your values such as sleep records, apnea, hypopnea, AHI, leakage, and you can be sure that you have a healthy therapy.

## Touch Screen




Designed with a very simple interface, UNIFLOW provides a high level experience to its users thanks to its **4.3 inch touch screen**.

## Integrated Humidifier

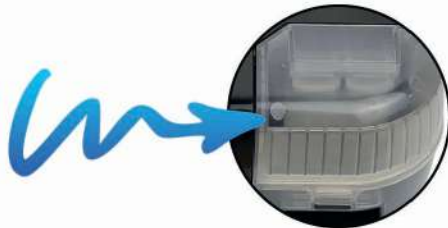

By **humidifying the cold air outside**, it allows you to continue your therapy comfortably with soft and warm air.



Fast Processor  
(400 mhz)



Touch  
Widescreen  
4.3 inches.




Digital Pressure  
and Flow Sensor



Integrated  
Humidifier




RESFLEX  
Feature



Ramp  
Feature



Auto Start and Stop



Adjustable Screen  
Brightness



Wide Adjustable  
Alarm Option



Silent





# G2S SERIES

## RespiroX G2S SERIES

### CPAP / AUTO CPAP / BILEVEL S / BILEVEL



#### Large Screen

Thanks to its large screen and user-friendly interface designed for ease of use, you can easily use it and customize your device according to you.

**CPAP-AUTO CPAP 2.4 inches**  
**BILEVEL S-BILEVEL ST 3.5 inches**



#### Integrated Humidifier

It can be easily carried and used thanks to its integrated humidifier designed for a comfortable treatment by breaking the hardness of the air.

### G2-S SERIES FEATURES

	CPAP	AUTO CPAP	BiLEVEL S	BiLEVEL ST
<b>Modes</b>				
CPAP	●	●	●	●
APAP		●		
SPONTAN(S)			●	●
TIME(T)				●
SPONTAN TIME (S/T)				●

<b>Device Features</b>				
Dimensions (274 x 184 x 115 mm)	●	●	●	●
Weight (1.9 kg)	●	●	●	●
Noise Level (<28 dB)	●	●	●	●
Pressure Range	4-20 cmh2o	4-20 cmh2o	4-25 cmh2o	4-25 cmh2o
Reslex	●	●	●	●
Ramp (0-60min)	●	●	●	●
Automatic Ramp Adjustment	●	●	●	●
Automatic Humidifier Setting	●	●	●	●
Auto Start - Stop	●	●	●	●
Automatic Leak Prevention	●	●	●	●
SD Card	●	●	●	●
365 Days Recording Feature	●	●	●	●
Screen size	2.4 inches	2.4 inches	3.5 inches	3.5 inches



# SOUNDSLEEP SERIES

ResproX SoundSleep Series  
CPAP / AUTO CPAP / BILEVEL S / BILEVEL  
ST / AUTO BILEVEL / BILEVEL PV



Comfortable Therapy  
Thanks to EPFlex Feature



User-Friendly Interface with Large  
Screen  
(2.4 inches)



Easily Refillable Large  
Water Tank



Topscan software can retrieve data from  
machines for more than 365 days for  
doctors to review data and compliance.  
You can also print the report output and  
send an e-mail.

Parameters	CPAP	APAP	BPAP S 20/25	BPAP Auto S 20/25	S/T 20/25/30/35	S/T Pro 25/30/35	S/T TVAPS 25/30/35
CPAP	✓	✓	✓	✓	✓	✓	✓
Auto		✓	✓	✓	✓	✓	✓
S			✓	✓	✓	✓	✓
Auto S				✓		✓	✓
S/T					✓	✓	✓
T					✓	✓	✓
PC							✓
TVAPS							✓
Alarms					✓	✓	✓
Real Time Waveform						✓	✓
Pressure Range	4-20	4-20	4-20/25	4-20/25	4-20/25/30/35	4-25/30/35	4-25/30/35
Humidification	0-5	0-5	0-5	0-5	0-5	0-5	0-5
EPFlex	✓	✓					
Auto Altitude Compensation	✓	✓	✓	✓	✓	✓	✓
Auto Leak Compensation	✓	✓	✓	✓	✓	✓	✓
Noise	<30dB						
Weight	0.95kg (without humidifier)						
Dimensions	140mm * 156mm * 94mm (without humidifier)						
Language	Multiple						

# MINI AUTO CPAP PRO

## RespiroX Mini AUTO CPAP PRO

With its thin, stylish, lightweight design, it is comfortable to use anywhere.

Screenless, easy to use with phone app.

With its ULTRA silent technology, it does not disturb the environment and you.

Device setup, reporting, device update via phone application.

Comfortable use with waterless humidification filter without an extra humidifier.



Dimensions: 159 x 66 x 72mm  
Working Mode: CPAP, AutoCPAP  
Pressure Range: 4-20 cmH<sub>2</sub>O  
Pressure Accuracy:  $\pm 0.5$  cmH<sub>2</sub>O  
Pressure Sensitivity: Standard / Soft / Female  
Ramp Time: 0-60 minutes  
Reslex Feature: Off, 1-3 Levels  
Auto Start: Available  
Auto Shutdown: Available  
Leak Alarm: Available  
Accessory Reminder: Available  
Automatic Leak Prevention: Available  
Software Update: Available  
Wireless Data Transfer: Available

### ONLY 400 GR

Auto CPAP and CPAP mode  
Automatic Ramp Feature  
Pressure Adjustment Sensitivity  
Maintenance Reminder  
Accessory Change Reminder  
Personalized Treatment Pressure  
Waterless Humidifier Filter  
Stylish Carrying Case



**USE OPPORTUNITY  
BETWEEN 16-26  
HOURS WITH  
OPTIONAL BATTERY**



# VENTILATOR - HFO DEVICE

## COVIDIEN PB560 VENTILATOR

### Technical Specifications



Only 4.5KG

Weight: 4.5 kg  
Dimensions: 23.5 cm x 31.5 cm x 15.4 cm  
Sound level: <30 dB  
Power supply: 100 – 240 VAC, 50/60 Hz – DC 12 – 30 VDC  
Power consumption: 180 W max.  
Internal battery: 4.4 Ah  
Battery life: up to 11 hours  
Operating temperature: 5°C to 40°C  
Pressure: 8.7 psi – 16 psi  
Alarm level: 65 – 85 dB  
Mods:  
CPAP, PSV S, PSV ST, PACV, VACV, PCV, VCV, V SIMV, P SIMV  
Performance Parameters:  
Volume: 50 ml – 2000 ml  
Pressure: 5 mbar – 55 mbar  
Ins. Time: 0.3 s – 2.4 s  
Breath Support: 1 bpm – 60 bpm  
Ins. Sensitivity: 1 – 5  
Ex. Sensitivity: 5% – 95%  
Peak Ins. Pressure (PIP): 0 mbar – 99 mbar  
Positive End Expiratory Pressure (PEEP): 0 mbar – 99 mbar  
Inspiratory Tidal Volume (VTI): 0 ml – 9999 ml  
Exhaled Tidal Volume (VTE): 20 ml – 9999 ml

## MC-1 HIGH FLOW OXYGEN THERAPY DEVICE

### Technical Specifications



Dimensions: 170 x 230 x 86 (without humidifier)  
Weight: ~ 1.2 kg (without humidifier)  
Flow Range: 10 - 80 LPM  $\pm$  10%  
Power Supply: 100 – 200 VAC, 50 – 60 Hz  
external power supply, 24 VDC  
Power Consumption: < 3 VA (without humidifier)  
Noise Level: < 29 dB(A) (10 hPa) (unmasked)  
Operating Temperature: +5 °C - +40 °C  
Storage Temperature: -20 °C - +70 °C  
Air Humidity: 10-95% relative humidity (operation and storage)  
Application: -400 m - +3500 m (700 hPa – 1060 hPa)  
(altitude above sea level)  
Flow Rate:  $\pm$  80%  
Oxygen Measurement Accuracy:  $\pm$  10%  
Alarm Functions: Low Oxygen Alarm

### PACKAGE INCLUDED



Power Adapter

Interconnection Tube

Carrying Bag

SOL Hospital Type Oxygen Manometer

Fire Safety Valve



High Flow Nasal Cannula

Heated and Humidifier Tube

Humidifier Unit

**SAFE TREATMENT** WITH FULLY REPLACEABLE APPARATUS TO ENSURE PATIENT STERILIZATION

# OXYGEN CONCENTRATORS

## JLO-590i OXYGEN CONCENTRATOR

Model JLO-590i

Working Voltage 220-240V / AC

Frequency 50 Hz.

Oxygen Flow 1- 5 liters/minute

Oxygen Purity 87% ~ 95.5%

Oxygen Monitor High Oxygen O2 > 93%+3%

Low Oxygen O2 < 86%+3

Technical Service Requirement < 70%

Operating Temperature 5-40 °C

Gross Weight 26 kg

Net Weight 24 kg

Type B, Class II

Sound Level : ≤55dB(A)

Time settings working mode

Instant oxygen density display

Compared to conventional oxygen concentrators

high energy saving efficient working system

Approved by the Ministry of Health, CE and ISO Certified

Alarm; Power failure, high and low pressure, temperature (65°) low saturation.

WITH NEBULIZER FEATURE

INSTANT OXYGEN  
INDICATOR



## KSW-5 OXYGEN CONCENTRATOR

Model KSW-5

Operating Voltage 220-240V/AC

Frequency 50 Hz.

Oxygen Flow 1- 5 liters/minute

Oxygen Purity 90% ~ 96

Oxygen Monitor High Oxygen O2 > 93+3%

Low Oxygen O2 < 86+3%

Technical Service Requirement < 70%

Operating Temperature 5-40 °C

Net Weight 17 kg

Type B, Class II

Sound Level : ≤54dB(A)

Time settings operating mode

Instantaneous oxygen concentration display

Efficient operating system with high energy savings compared to conventional oxygen concentrators

CE and ISO Certified by the Ministry of Health

Alarm; Power failure, high and low pressure, temperature (65°) low saturation.





# OXYGEN CONCENTRATORS

## SZ-T OXYGEN CONCENTRATOR

Model SZ-T

Operating Voltage 220-240V/AC

Frequency 50 Hz.

Oxygen Flow 1- 10 liters/minute

Oxygen Purity 87% ~ 95.5%

Oxygen Monitor High Oxygen O<sub>2</sub> > 93+3%

Low Oxygen O<sub>2</sub> < 86+3%

Technical Service Requirement < 70%

Operating Temperature 10- 35 °C

Gross Weight 29 kg

Net Weight 27 kg

Type BS Class II

Sound Level : <= 59 dBA

Time settings operating mode

Instantaneous oxygen concentration display

Efficient operating system with high energy savings compared to conventional oxygen concentrators

CE and ISO Certified by the Ministry of Health

Alarm; Power failure, high and low pressure, temperature (65°) low saturation.

# 10 LITER

WITH NEBULIZER FEATURE



INSTANT OXYGEN INDICATOR



## SZ-5DW OXYGEN CONCENTRATOR

Model SZ-5DW

Operating Voltage 220-240V/AC

Frequency 50 Hz.

Oxygen Flow 1- 5 liters/minute

Oxygen Purity 87% ~ 95.5%

Oxygen Monitor High Oxygen O<sub>2</sub> > 93+3%

Low Oxygen O<sub>2</sub> < 86+3%

Technical Service Requirement < 70%

Operating Temperature 5- 40 °C

Gross Weight 21 kg

Net Weight 19 kg

Type BS Class II

Sound Level : <= 58 dBA

Time settings operating mode

Instantaneous oxygen concentration display

Efficient operating system with high energy savings compared to conventional oxygen concentrators

CE and ISO Certified by the Ministry of Health

Alarm; Power failure, high and low pressure, temperature (65°) low saturation.

Turkish Speaking



# OXIMETERS

## TABLE TYPE OXIMETER(CMS70A)



SPO2 Measuring range: 0 ~ 100%

Alarm range: 0 ~ 100%

Pulse Rate: Range: 0 ~ 254bpm

Resolution: 1bpm

Accuracy:  $\pm 1$ bpm

Data Memory

Systolic Blood Pressure Measurement

It is suitable for adult, child and infant patient use.

Compatible with ratchet-type oximetry probe

and adhesive probe

Printing from the printer with optional apparatus

Easy value interpretation with trend chart

## RECHARGEABLE

## HAND TYPE OXIMETER(CMS60D)



SPO2 Measuring range: 0 ~ 100%

Pulse Rate: Range: 0 ~ 240bpm

Resolution: 1bpm

Accuracy:  $\pm 1$ bpm

Data Memory

It is suitable for adult, child and infant patient use.

Compatible with ratchet-type oximetry probe

and adhesive probe

Printing from the printer with optional apparatus

Easy value interpretation with trend chart

## WITH BATTERY

## FINGER TYPE OXIMETER(CMS50DL)



LED 4-way display

Low power consumption,

powered by 2 AAA batteries

SpO2, heart rate and heart rate bar display

One button feature

High quality

## ONLY 33GR



# SUCTION MACHINES

## JLP-002 BATTERY ASPIRATOR



### BATTERY

Can be charged from automobile cigarette lighter input.  
 High negative pressure, low flow  
 Power supply: AC120V±10% AC220V±10%  
 Input power : 65VA  
 Negative pressure limit: ≥0.075Mpa  
 Negative pressure regulation range: 0.02Mpa ~  
 negative pressure limit Aspiration rate: ≥15L/min.  
 Liquid storage bottle : 1000mL  
 Audio: ≤65dB(A)  
 Net Weight: 5.2Kg  
 Size: 330x187x300(mm)

## JLP-001 STANDART ASPIRATOR



### STANDARD

Can be used at all voltages between  
 100-240 VAC.  
 550 mmHg vacuum  
 Aspiration rate: ≥15L/min  
 Small and lightweight portable design  
 Integrated bacteria filter  
 Transport blocking function  
 Size: 280 x 196 x 285 mm  
 Vacuum range 80-550 mmHg  
 Weight 5 kg

## ASU-200 BATTERY ASPIRATOR



### HIGH PERFORMANCE

Portable and easy to use  
 Small size, light weight and portability  
 High vacuum strength -80kPa  
 Aspiration rate: ≥24L/min.  
 60 minutes working time with full battery  
 Battery charging time : 3 hours  
 User-dependent 800-1000 ml aspirating container  
 Operation : AC 100V-240V - DC 12V  
 Vacuum range 80-600 mmHg  
 Battery : 14.8V 2.5Ah  
 Dimensions 190 x 110 x 175 mm  
 Weight : 1.7 kg

# BLOOD PRESSURE INSTRUMENTS

## AXD-809 ARM BLOOD PRESSURE MONITOR



Turkish Speaking



Irregular Heartbeat Detection



Automatic Shutdown



Carrying Case



Back Light



2 Users  
90 Registration



Use with  
Adapter



Long  
Life



## TECHNICAL SPECIFICATIONS

Display : LED Screen  
Measurement Range : Blood pressure: 0 to 280 mmHg,  
Pulse Rate: 40 to 180/min  
Accuracy/Calibration : Blood Pressure:  $\pm 3$ mmHg  
Pulse rate:  $\pm 5\%$   
Inflation : Automatic with electric pump  
Extinguishing : Automatic pressure relief valve  
Sudden Air Outlet : Automatic exhaust valve  
Measurement Method : Oscillometric Method  
Power Supply : 4 AAA Type 1.5 V alkaline batteries  
Battery Life : Approx. 500 uses with 4 new alkaline batteries 6 times a day  
Sleeve Circumference : 22 to 42 cm  
Memory : 90 measurements per user

## AXD-806 ARM BLOOD PRESSURE MONITOR



Turkish Speaking



Irregular Heartbeat Detection



Automatic Shutdown



Carrying Case



Back Light



2 Users  
90 Registration



Use with  
Adapter



Long  
Life



## TECHNICAL SPECIFICATIONS

Display : LCD Screen  
Measurement Range : Blood pressure: 0 to 280 mmHg,  
Pulse Rate: 40 to 180/min  
Accuracy/Calibration : Blood Pressure:  $\pm 3$ mmHg  
Pulse rate:  $\pm 5\%$   
Inflation : Automatic with electric pump  
Extinguishing : Automatic pressure relief valve  
Sudden Air Outlet : Automatic exhaust valve  
Measurement Method : Oscillometric Method  
Power Supply : 120 V 60 Hz  
Battery Life : Approx. 500 uses with 4 new alkaline batteries 6 times a day  
Cuff Circumference : 22 to 42 cm  
Memory : 2 users in total, 90 measurements for each user  
Speech: English  
Manchon size: 64 cm



# BLOOD PRESSURE MONITOR AND THERMOMETER

## JN-163EW WRIST BLOOD PRESSURE MONITOR



Turkish Speaking



Irregular Heartbeat Detection



Automatic Shutdown



Carrying Case



Back Light



2 Users  
90 Registration



Use with Adapter



Long Life



### TECHNICAL SPECIFICATIONS

Power Supply: 2\*AAA size 1.5 V battery

Dimensions: 40mm x 48mm

Weight 106 g (without battery)

Sleeve Size: 13.5-19.5 cm

Memory: Maximum 90 records per user

Power Saving: 180 s standby then auto power off

Pressure Range: 0-260 mmHg

Heart Rhythm Range: 40-180 bpm

Systolic Measurement Range: 50 mmHg -250 mmHg

Diastolic Measurement Range: 30 mmHg -180 mmHg

Pulse Measurement Range: 40-180 bpm

Maximum Inflation Pressure: 260 mmHg

Pressure Accuracy:  $\pm 3$  mmHg ( $\pm 0.4$  kPa)

Pulse Accuracy:  $\pm 5\%$

Measurement Unit: mmHg / kPa

Operating Conditions: 10°C - 40°C (50°F - 104°F)

15% - 95% relative humidity

Storage Conditions: -20°C - 55°C (-4°F - 131°F)

15% - 93% relative humidity

## JM-01801 NON-CONTACT THERMOMETER



Stores the Last  
32 Measurements



LCD Screen



Human and Object  
Measurement



3 Color Fever  
Indicator

### TECHNICAL SPECIFICATIONS

Product Name: Non-Contact Thermometer

Product Model: JM-01801

Measurement Range: 32°C - 42.2°C

Maximum Tolerable Error:  $\pm 0.2^\circ\text{C}$  (35.0°C - 42.0°C)

Measurement Accuracy:  $\pm 0.3^\circ\text{C}$  (32.0°C - 34.9°C / 42.1°C - 42.2°C) 0.1°C

Memory Function: 32 Set Temperature Memory

Power Source: AA Battery X2

Automatic Shutdown Time: 30 Seconds

Product Size: 71 mm (L) x 46 mm (W) x 151 mm (H)

Product Weight: 85 g (without battery)

Operating Conditions: Temperature: 16°C - 35°C

CRH: 15% - 80%

Atmospheric Pressure: 70 kPa - 106 kPa

Storage and Shipment Conditions:

Temperature: -20°C - 55°C

Relative Humidity 15% - 93%

Atmospheric Pressure 70 kPa - 106 kPa

# MASKS AND ACCESSORIES

## NASAL MASKS



N5A NASAL  
MASK



N5B NASAL  
MASK



CIRRI-MINI  
BABY AND  
CHILD NASAL  
MASK



QUALITY IS ALWAYS  
WITH YOU.

## FULL FACE MASKS



F5  
FULL FACE  
MASK



F5A  
FULL FACE  
MASK



RAP  
FULL FACE  
MASK



WE BELIEVE THAT  
EVERY BREATH  
IS A GIFT.

## OTHER MASKS AND ACCESSORIES



FITMAX  
TOTAL FACE  
MASK



P2  
NASAL  
PILLOW MASK



HEATED AND  
HUMIDIFIER  
TUBE



STANDARD  
TUBE

OXYGEN  
CONCENTRATOR  
WATER BOTTLE



OXYGEN  
CONCENTRATOR  
FILTER



# BATTERY POWERED WHEELCHAIRS

## RATS-01 BATTERY POWERED WHEELCHAIR



Ergonomic



300W  
2 Pcs Motor



120 kg  
Carrying  
Capacity



40 kg  
Chair Weight



More  
Comfortable  
with Extra  
Suspension



360 Degree  
Joystick



Hill Brake  
Assist



Foldable

## RATS-02 WHEELCHAIR WITH LITHIUM BATTERY



Lithium  
Battery  
24V 6Ah



Bluetooth  
Remote  
Control



20 kg  
Chair Weight



100kg  
Carrying  
Capacity



360 Degree  
Joystick



Hill Brake  
Assist



Foldable



More  
Comfortable  
with Extra  
Suspension



## RATS-03 WHEELCHAIR WITH LITHIUM BATTERY



Bluetooth  
Remote  
Control



Lithium  
Battery  
24V 12Ah



115 kg  
Carrying  
Capacity



29 kg  
Chair Weight



Electromagnetic  
Brake



360 Degree  
Joystick



Hill Brake  
Assist



Foldable

# BATTERY POWERED WHEELCHAIRS

## RATS-PRO BATTERY POWERED WHEELCHAIR



The reclining backrest provides a more comfortable journey.



Motor:  
24V DC 400W



Battery: 2x  
DC12, 35Ah



Maximum  
Driving Speed:  
10 km/h

<b>S</b> Steel Frame Material	 Total Length 119 cm	 Total Height 122 cm	 Total Width 68 cm	 Seat Width 68 cm	 Seat Depth 48 cm
 Front Wheel Size 16 inch	 Rear Wheel Size 10 inch	<b>KG</b> Gross Weight 115 Kg	 Net Weight 105 Kg	 Backrest Height 63 cm	 Armrest Height 77 cm



# BATTERY POWERED WHEELCHAIRS

## BC-EA BATTERY POWERED WHEELCHAIR

### BC-EA8000 BATTERY POWERED WHEELCHAIR

- Frame  
Aluminum Alloy
- Seat Width  
46CM
- Seat and Backrest  
Thickened Sponge Cushion
- Armrest  
Liftable Armrest
- Sleeping  
Aluminum Alloy
- Front Wheel  
8 inch
- Rear Wheel  
12 inch (pneumatic)
- Batarya  
24V12Ah Lithium Battery
- Maximum Range  
20-25KM
- Motor  
300W\*2 Brushed Motor
- Speed  
0-8 km/h



**Large  
Storage Space**



**Aluminum  
Alloy Motor**



**Liftable  
Armrest**



**Remote  
Controlled**

# BATTERY POWERED WHEELCHAIRS

## BC-EA BATTERY POWERED WHEELCHAIR

### BC-EA8009 BATTERY POWERED

Motor: 250W\*2 Brushed  
Battery: 24V 12Ah Lead-Acid  
Adapter: AC110-240V 50-60Hz  
Output: 24V  
Control: 360° Joystick  
Maximum Load: 120 KG  
Charging Time: 6-8h  
Forward Speed: 0-6km/h  
Reverse Speed: 0-6km/h  
Turning Radius: 60 cm  
Climbing Ability:  $\leq 13^\circ$   
Driving Distance: 20-25 km  
Seat: W44\*L48\*T4 cm  
Backrest: W44\*L40\*T4 cm  
Front Wheel: 10 inch  
Rear Wheel: 24 inch (pneumatic)  
Size: (Unfolded): 119\*68\*95 cm  
Size: (Folded) 88\*39\*79 cm  
Package Size: 90\*38\*72 cm  
Gross Weight: 50KG  
Net Weight (with battery): 45KG



**Easy Foldable**



**360° Joystick**



**Front View**



**Aluminum Alloy  
24-inch Rear Wheel**



# DM28 SERIES



## DM28 SERIES

CPAP  
AUTO CPAP  
BILEVEL S  
BILEVEL ST



Ramp  
0-60/min



Smart  
Start



Leak  
Alert



Automatic  
Mask Type  
Selection



Quality  
Assurance



Record  
Keeping  
Feature



Integrated  
Moisturizer



Quiet  
Operation



5 Inch  
Screen



Accessory  
Replacement  
Reminder



THERE IS A HOSE  
IN THE PACKAGE.

### Device Specifications

Dimensions (270 x 143 x 139.3mm)

Weight (1.6 kg)

Sound Level (<28 dB)

AC Input: 100~240V AC, 50/60Hz, 72W

Power Adapter Output: 24V DC, 3.0A

Pressure Range

CPAP - 4~20 cmH<sub>2</sub>O / AUTO CPAP - 4~20 cmH<sub>2</sub>O / BPAP S - 4~25 cmH<sub>2</sub>O / BPAP ST - 4~30 cmH<sub>2</sub>O

Ramp Feature: 0-60 min

# ELECTRONIC HOME APPLIANCES

## BL-2601 SMART SCALE WITH BLUETOOTH



Weight Measurement  
from 3 Kg to 180 Kg



Low Battery Indicator



Connect to a Phone  
with Bluetooth



Room Temperature  
Indicator



Accessing Test Results  
through the App



Weight, Body Fat,  
Visceral Fat, Muscle,  
Bone, BMR and BMI  
Measurement

## AIRX-ONE ULTRASONIC ROOM HUMIDIFIER



Night Light  
Feature



2.5 Liter Hopper  
Capacity



Top Fillable



Side View



Ultra-quiet



# NEBULIZERS

## AXD-303 COMPRESSOR NEBULIZER



High  
Nebulization  
Rate



Adjustable  
pressure  
controlled drug

Power Supply : AC 220 V 50 Hz

Power : 130 VA

Droplet Size (MMAD) :  $1\ \mu\text{m} \sim 5\ \mu\text{m}$

Noise Level :  $\leq 65\ \text{dB}$

Average Spray Rate :  $\geq 0.2\ \text{ml/min.}$

Waste Liquid :  $\leq 0.7\ \text{ml}$

Ambient Temperature :

Operating Environment:  $5^{\circ}\text{C} \sim 40^{\circ}\text{C}$

Storage:  $-20^{\circ}\text{C} \sim +55^{\circ}\text{C}$

Relative Humidity :

Operating Environment:  $\leq 80$

Storage:  $\leq \%93$

Content :

Device, Air Hose, 5 Spare Filters, Mask, User  
Manual

## YS31 MINI MESH NEBULIZER



Lithium  
Battery



Quiet  
Operation



Rechargeable



Lightweight  
and  
Portable

Power consumption: 1.5W

Input: 5V/1A (USB) / DC 3.7V (lithium battery);

Oscillation Frequency:  $108\text{kHz} \pm 10\%$

Condensation rate :  $\geq 0.2\ \text{ml/min}$

Atomized particles:  $\leq 4\ \mu\text{m}$

Maximum volume: 8ml

Product weight:  $80\text{g} \pm 10\%$

Dimension (WxExH):  $36 \times 32 \times 110\text{mm}$

Operating Conditions: Temperature:  
 $+5^{\circ}\text{C} - +40^{\circ}\text{C};$

Relative humidity:  $< 93\% \text{ RH, non-condensing}$

Storage and Transportation Conditions:

Temperature:  $-20^{\circ}\text{C} - +50^{\circ}\text{C}$

Relative humidity:  $< 93\% \text{ RH, non-condensing}$   
80-100 minutes of use on a full charge.

### CHARGED



# AIR MATTRESSES

## RHB-10 AIR VENTILATED TUBULAR AIR MATTRESS



23 Bed Cells, 8 of which  
are Air Ventilated.



**Bed Features**  
Weight Capacity : 130-140 kg  
Bed Weight : 1.8-2.1 kg  
Dimensions : 240 cm (L) x 97 cm (W)  
Material : Nylon PVC/PU cell, nylon PVC/PU sheath

**Compressor (Pump) Features**  
Cycle Time : 12 min  
Air Output : 5 ~ 7 L/min  
Pressure Range : 50 ~ 120 mmHg  
Power Supply : 110 V / 220 V, 50-60 Hz  
Power Consumption : 7 W

## RHE-22 DIAMOND TYPE AIR MATTRESS



Provides Wavy Pumping Thanks to the  
Bubbles on the Inflatable Mattress.

**Bed Features**  
AC 220 V / 50 Hz  
Operating Ambient Temperature: 10°C ~ 35°C  
Storage Ambient Temperature: -15°C ~ 50°C  
Operating Environment Relative Humidity: 20% ~ 80%, non-condensing  
Storage Environment Relative Humidity: 10% ~ 90%, non-condensing  
Length 78.5", Width: 35.5", Bubble Diameter: 3"  
Pump Output: 4 liters per minute  
Variable cycle time 10 minutes  
Material PVC (anti-fire)  
Withstands up to 136 kg  
The diamond-type design provides superior treatment for patients.



# AIR MATTRESSES

## RHP-04 POSITIONING AIR MATTRESS



Detachable pipes.

### Bed Features

Size: 200cmx90cmx11.5-40cm

Number of Air Pipes : 18

Material: TPU

Weight: 8.6 Kg

Maximum Weight: 150 kg

Pump Size: 28cmx10.2cmx16.5cm

Air Output: 6-8 L/min

Pressure Range: 30-80mmHg


Cycle Time: 12/18/24 min

Power Input: 220V/50-60Hz

Weight: 1.6 Kg

Functions: automatic alternating, automatic return, static and elevation of the head end and foot end.

## RHB-01 AIR PIPE TYPE AIR MATTRESS

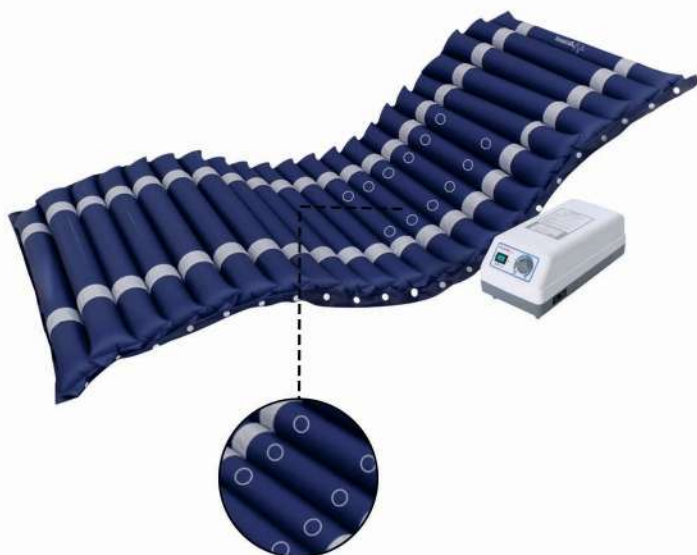

Microporous air holes prevent bacterial production.

### ① Inflation and Deflation Function

a) Inflation pressure is adjustable between 0 and maximum inflation pressure range, maximum inflation pressure should not be below 12kPa.

b) Charge and discharge cycle; 10 min.  $\pm$  10%.

c) Air Spray Function (C-02P, C-02S, C-04P, C-04S): When the inflation pressure reaches 3 kPa  $\pm$  0.5 kPa, the micropores in the air chamber can discharge air evenly.

d) Sleep Function (C-01S, C-02S, C-03S, C-04S, D-05S): When the adjustment knob of the air pump is set to sleep mode, the mattress stops inflating and remains in a static state.

e) Rapid Evacuation Function: Rapid evacuation of air can be realized during CPR.

② Side Body Angle (C-041P, C-041S): 0~85°.

③ Air Tightness: When the bed is inflated to the maximum air pressure, the load is 135 kg for 24 hours, and the pressure loss from the maximum value is not more than 5%.

④ Noise Level: highest 45dB (A-weighted)

⑤ Continuous Use Time: More than 24 hours

⑥ Weight: maximum 135 kg

⑦ Electromagnetic Compatibility

# ROLATORS

## RR-01 FOLDABLE ALUMINUM ROLATOR - RED

Model: RR-01  
Maximum Payload: 120 Kg  
Wheels: 6 Inch PVC  
Easy folding Mechanism  
Brake Support  
Backrest Support



With Basket



## RR-02 FOLDABLE ALUMINUM ROLATOR - BLUE

Model: RR-02  
Maximum Payload: 120 Kg  
Wheels: 8 Inch PVC  
Easy folding Mechanism  
Brake Support  
Backrest Support



With Bag





# ROLATORS

## RR-03 FOLDABLE ALUMINUM LUX ROLATOR - BLUE

Model: RR-03  
Maximum Payload: 120 Kg  
Wheels: 8 Inch PVC  
Easy folding Mechanism  
Brake Support  
Backrest Support  
Frame: Powder Painted Frame  
Adjust Arm Height With One Button  
6-Stage Adjustable Height



With Bag

## RR-04 FOLDABLE ALUMINUM LUX ROLATOR - GREY

Model: RR-04  
Maximum Payload: 120 Kg  
Wheels: 8 Inch Rear PVC, 10 Inch Front PVC  
Easy folding Mechanism  
Brake Support  
Backrest Support  
Frame: Aluminum Frame



With Bag

# BREAST PUMPS

## D-188 MANUAL BREAST PUMP

Thanks to Manual Breast Pump,  
the Baby Gets Used to Breastfeeding



Tensile Strength:  
-36 kPa



Baby Bottle  
Reservoir: 150cc



Hygienic, strong  
and easy milking.



Non-toxic,  
high temperature  
resistant PP material.



Environmentally safe  
material that does  
not release BPA.



MANUAL USE



## DQ-S600A ELECTRIC BREAST PUMP

Fast and Practical Milking



Tensile Strength:  
-42 kPa



Double Heads



Adjustable  
Suction Power



USB Wired



BPA Free



ELECTRIC USE



## DQ-S007 RECHARGEABLE BREAST PUMP

Practical and Effective Milking  
with Rechargeable Milk Pump



Tensile Strength:  
-42 kPa



Baby Bottle  
Reservoir: 150cc



USB Wired



Lithium Battery  
Powered



Wherever You  
Need It!



BPA Free



TOUCH  
INDICATOR



RECHARGEABLE





# MANUAL WHEELCHAIRS

## RMTS-01 MANUAL WHEELCHAIR

Model: RMTS-01  
Maximum Payload: 120 Kg  
Frame: Durable Carbon Steel Frame  
Wheels: Double Scissorred,  
24 Inch Rear Wheel  
8 Inch Front Wheel  
Weight: 15 Kg  
Hand Rim



Companion Brake



## RMTS-02 MANUAL WHEELCHAIR

Model: RMTS-02  
Maximum Payload: 120 Kg  
Frame: Durable Aluminum Frame  
Wheels: Double Scissorred,  
20 Inch Rear Wheel  
6 Inch Front Wheel  
Removable Footrests  
Weight: 17 Kg  
Hand Rim



Companion Brake



# MANUAL WHEELCHAIRS

## BME-4611D MANUAL WHEELCHAIR



Removable Foot Plate

Leg Support  
Fixed Backrest  
Foot Rest Strap  
Brake Feature  
Hand Rim  
Easily foldable and portable

## BME-4611C MANUAL WHEELCHAIR



Frame Chrome  
Plated Steel

Surface Electroplating / Chrome  
Armrest PVC fixed handrail  
Steel hand pulley  
Seat cushion Black nylon seat cushion  
Back cushion Black nylon pillow  
Foot support Fixed  
Foot Aluminum alloy  
Front wheel 8 "  
Rear wheel 24", Sleeved wheels

## BME-4634 MANUAL WHEELCHAIR











Frame Aluminum alloy  
Surface Bright silver oxidation  
Hand grips PVC fixed handrail  
Pillow Nylon  
Back Pad Nylon  
Foot Plastic  
Brake Rear parking brake  
Front wheel 6", PVC tire  
Rear wheel 12", PVC tire

● ●  
Blue and Black  
Color Option



# PATIENT TRANSFER VEHICLES

## RTS-01 PATIENT TRANSFER VEHICLE

			
Durable frame	Full size 88 cm	Seat width 45 cm	Box size 73cm*27cm*74cm
			
Infill front wheel size 6 inch	Infill Rear wheel size 16 inch	Gross weight 13 Kg	Net weight 11 Kg






Companion Brake



## RTS-02 PATIENT TRANSFER VEHICLE

Size (cm)					
MODEL	RTS-02	55	88	91.5	48

Seating Area			
40	56*37*84	100	10.5



Easily Foldable



# FEEDING PUMPS / FEEDING BAGS

## ENTERAL FEEDING BAG - SINGLE



**1200  
ml**

Single Bag  
1200 ml

The product can be used in combination with an enteral feeding pump to deliver nutrient solution to the patient's intestines or stomach.

Single Use Only.

Working pressure <100kPa.

Can be used for 24 hours.

Single Bag.

## ENTERAL FEEDING BAG - DOUBLE

**x2  
1200  
ml**

Double Bag  
Each 1200 ml



The product can be used in combination with an enteral feeding pump to deliver nutrient solution to the patient's intestines or stomach.

Single Use Only.

Working pressure <100kPa.

Can be used for 24 hours.

Double Bagged.

## ME 10 RECHARGEABLE FEEDING PUMP



Rechargeable  
Battery

It has a fast cleaning feature.

Quick Start: The parameters you have previously set are stored in memory and can be recalled automatically.

Easy Operation: Thanks to its touch screen, it can be used with gloves.

High battery capacity:

Built-in rechargeable lithium batteries can easily support normal working environment for 6 hours during patient transportation or power failure.

LCD screen.



# ABOUT US



is a brand established 15 years ago with the aim of being number one in the respiratory sector.

## **WHO ARE WE?**

As the Respirox brand, we take care to provide you with the best service in order to offer and market the best technological products to medical marketing professionals.

Our mission is to provide high quality devices and health services to patients from all segments of society.

## **High Quality**

We prefer the best quality products and deliver these products to you in order to have very few negative feedback on our products and to avoid problems for the supplier and the end user. We promise that we will never give up this policy in order to be one of the forward-looking leaders of the industry.

## **Reasonable Price**

Keeping our prices at the most appropriate levels so that every user and supplier can access our products has been our biggest supporter in becoming one of the leaders of this sector. We guarantee that our price policy will always be user and supplier friendly.



Every breath  
is a gift.



We believe that  
every breath  
**is a gift**

AUTHORIZED DEALER



Turkish  
Catalogue



Konum  
Location



English  
Catalogue

[www.respirox.com.tr](http://www.respirox.com.tr)

[info@respirox.com.tr](mailto:info@respirox.com.tr)

**444 78 96**

Main Address: Cihangir Mah. Kemal Türkler Sk. No:5/1 Avcılar / ISTANBUL